



QualityBox PC EK738

Basic kits


Clear dimensions: 800 x 2000 mm

External dimensions: 960 x 2160 mm

Basic kit with **cast-iron** cover:

Clear height: 100 mm


Test classes according to DIN EN 124	B 125²
Complete cover	271.5 kg
Cover	54.5 kg
Hot-dip galvanised steel frame	39.5 kg
Top frame (standard height)	49.0 kg
Base plate	12.5 kg
Total weight of basic kit	372.5 kg
Overall height of basic kit	240 mm

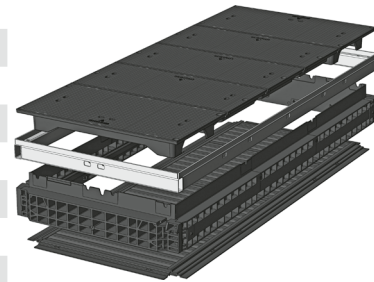

Basic kit with **concrete-lined steel** cover:

Clear height: 195 mm

Test classes according to DIN EN 124	B 125²	D 400³
Complete cover	471.0 kg	471.0 kg
Cover	157.0 kg	157.0 kg
Hot-dip galvanised steel frame	65.0 kg	65.0 kg
Top frame (standard height)	49.0 kg	49.0 kg
Base plate	12.5 kg	12.5 kg
Total weight of basic kit	597.5 kg	597.5 kg
Overall height of basic kit	310 mm	310 mm

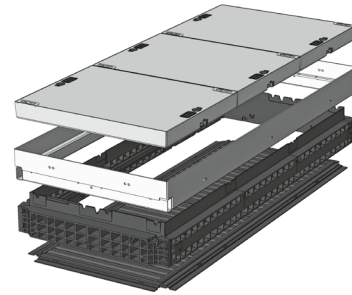




QualityBox PC EK738

Frame / Vario Module


Clear dimensions: 800 x 2000 mm
External dimensions: 960 x 2160 mm

220 mm


Vario Module

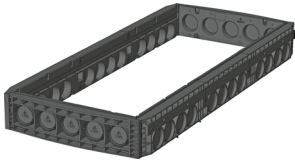


Frame 220 mm
Art. no.: 06 738 0052E
5 x Ø 110
12 x Ø 110
Weight: 73.0 kg

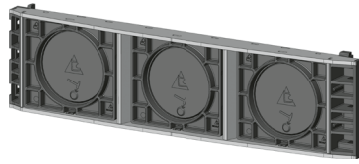


Vario Module
Art. no.: 06 328 0350E
CD800 3 x 160 mm

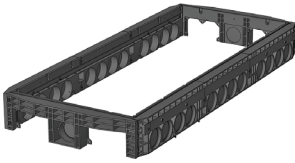

Frame 220 mm overbuild
Art. no.: 06 738 0061E
2 x rectangular / 1 x Ø 110
12 x Ø 110
Weight: 73.0 kg

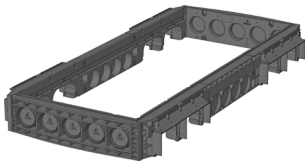

Frame 220 mm overbuild
Art. no.: 06 738 0085E
5 x Ø 110
4 x rectangular / 4 x Ø 110
Weight: 73.0 kg

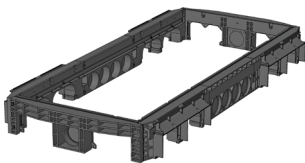

Frame 220 mm overbuild
Art. no.: 06 738 0087E
2 x rectangular / 1 x Ø 110
4 x rectangular / 4 x Ø 110
Weight: 72.5 kg

**QualityBox PC EK738**

Order numbers

Clear dimensions: 800 x 2000 mm

External dimensions: 960 x 2160 mm

Manhole with cast-iron cover, screwed down	Order number
Basic kit B 125, not screwed, screw connection retrofittable	06 738 1003

Accessories for cast-iron cover, screwed down

14 x hex screw connections	50 000 5800
14 x hexagon socket screw connections	50 000 5950
14 x LIC-LOCK screw connections	50 000 5900
14 x COLT/TELENET screw connections	50 000 5960
Sealing plug for screw connection, black	70 043 0300
Cast-iron cover B 125, 5-piece, with joint bars	70 044 6600E
Steel frame	70 044 7499E

Manhole with concrete-lined steel cover, lockable ⁴

Basic kit B 125, without lock, locks retrofittable	06 738 1008
Basic kit D 400, hex locking mechanism	06 738 1010
Basic kit D 400, hexagon socket locking mechanism	06 738 1011
Basic kit D 400, LIC-LOCK locking mechanism	06 738 1012
Basic kit D 400, COLT/TELENET locking mechanism	06 738 1013

Accessories for concrete-lined steel cover, lockable

6 x hex locking mechanisms	50 000 6500
6 x hexagon socket locking mechanisms	50 000 7500
6 x LIC-LOCK locking mechanisms	50 000 8500
6 x COLT/TELENET locking mechanisms	50 000 9500
Sealing plug for locking mechanism, black	70 046 0716
Concrete-lined steel cover, B 125, 3-piece	70 049 7375E
Concrete-lined steel cover, D 400, 3-piece ⁴	70 049 7370E
Steel frame	70 049 6280E

For all basic kits

Top frame, height 140 mm	06 738 0082E
Base plate, height 5 mm	06 738 0054E